



A B C D E F G H

Version	Date	Amending content	Editor
A/0	2017.07.23	/	YH

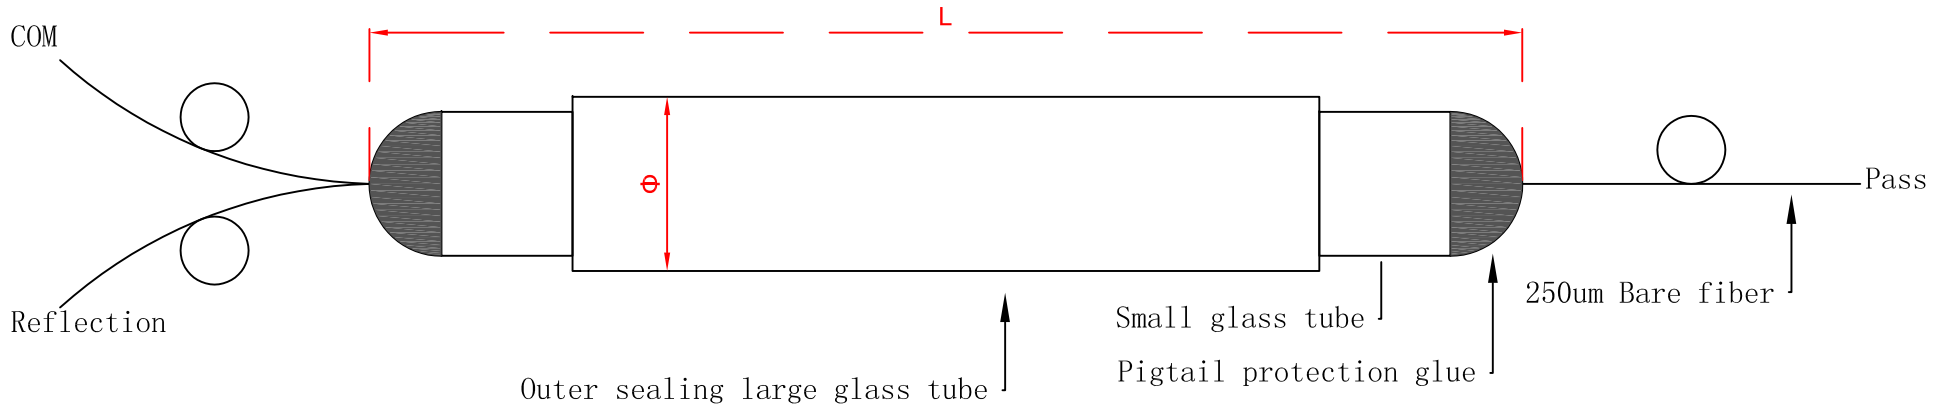

Items	Unit	3Port CWDM
Operating wavelength	nm	1260~1620nm&1460~1620nm
Transmission band	nm	±6.5nm、±7.0nm、±7.5nm
Transmission band insertion loss	dB	≤0.6
Reflection band insertion loss	dB	≤0.4
Transmission Adjacent Isolation	dB	≥30
Transmission Non-adjacent isolation	dB	≥45
Reflection Isolation	dB	≥15
Return loss	dB	≥50
Directivity	dB	≥50
Ripple	dB	≤0.3
Package dimension	mm	Φ4.0xL30mm ; MINI : Φ3.2xL30mm、Φ3.0xL30mm、Φ2.6xL25mm、Φ2.2xL25mm
Operating temperature	°C	-40~+85

Note:
 1. Fiber Type: Customization;
 2. Fiber Length: Customization.

Title	3Port CWDM			 HYC Page:1-1
Item number	/	Drawing No.	HYC-WDM-002	
Drawing	YH	Date	2017.07.23	
Check	LK	Version	A/0	
Approval	LSC	Unit:mm	☉ □	

1
2
3
4
5
6