



A B C D E F G H

Version	Date	Amending content	Editor
A/0	2019.06.25	/	YH

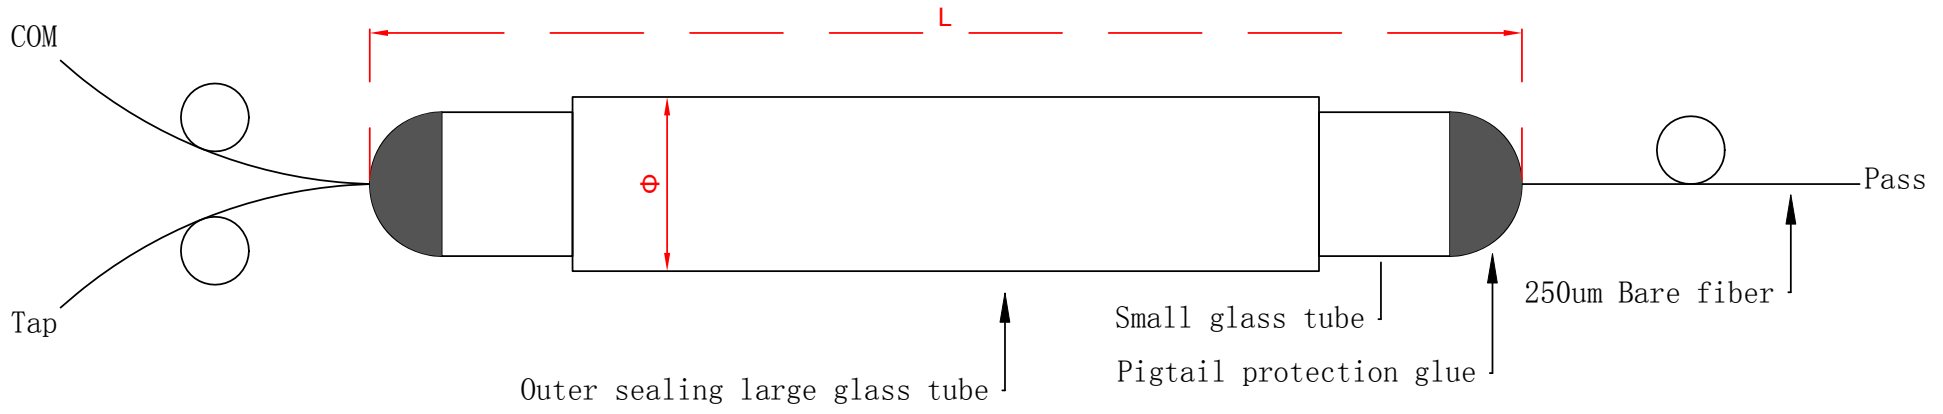

Item	Unit	3port TAP				
Fiber mode	/	Single Mode (SM)			Multimode (MM)	
Operating wavelength	nm	1260~1650			800~900	
TAP Ratio	%	90 : 10	80 : 20	70 : 30	60 : 40	50 : 50
Insertion Loss Pass Port	dB	≤1.0	≤1.5	≤2.1	≤2.8	≤3.5
Insertion Loss Tap Port	dB	≤10.6	≤7.5	≤5.8	≤4.5	≤3.5
Return Loss	dB	≥50			≥30	
Wavelength Dependent Loss	dB	≤0.5				
Directivity	dB	≥45				
Maximum Power Handling	mW	≤500				
Fiber type	/	Corning Ultra/G657A2			OM1/OM2/OM3/OM4	
Package dimension	mm	Φ4.0xL30 for 250um bare fiber ; Φ5.5xL38 for 900um loose tube				
Operation temperature	°C	-40~+85				

Note:  
 1. Fiber Type: Customization;  
 2. Fiber Length: Customization.

Title	3Port TAP Device			 <b>HYC</b> Page:1-1
Item number	/	Drawing No.	HYC-WDM-026	
Drawing	YH	Date	2019.06.25	
Check	LK	Version	A/0	
Approval	LSC	Unit:mm	⊕ □	