



A B C D E F G H

Version	Date	Amending content	Editor
A/0	2017.07.23	/	YH

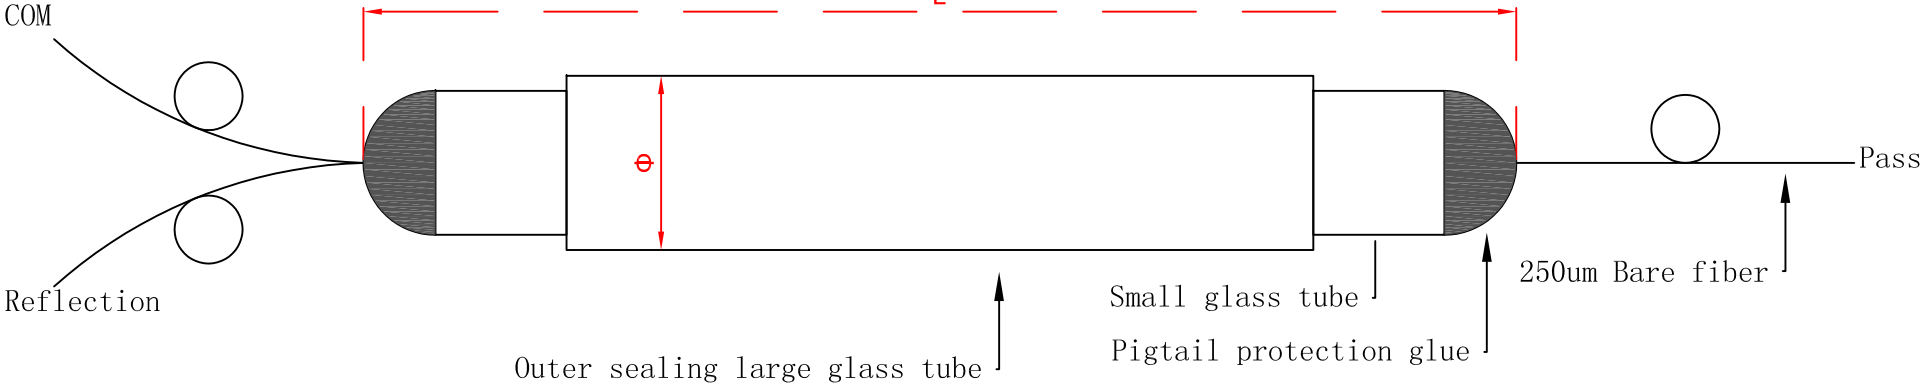

Items	Unit	3Port FWDM		
Operating wavelength	nm	1260~1670nm		
Transmission band	nm	1540~1560	1524~1544&1596~1625	customer specified
Reflection band	nm	1260~1360&1480~1500	1260~1500&1550~1581&1640~1670	customer specified
Transmission band insertion loss	dB	≤0.6		
Reflection band insertion loss	dB	≤0.4		
Transmission Isolation	dB	≥30		
Reflection Isolation	dB	≥15		
Return loss	dB	≥50		
Directivity	dB	≥50		
Ripple	dB	≤0.3		
Package dimension	mm	Φ4.0xL30mm ; MINI : Φ3.2xL30mm、Φ3.0xL30mm、Φ2.6xL25mm、Φ2.2xL25mm		
Operating temperature	°C	-40 ~ +85		

Note:
 1. Fiber Type: Customization;
 2. Fiber Length: Customization.

Title	3Port FWDM			 HYC Page:1-1
Item number	/	Drawing No.	HYC-WDM-001	
Drawing	YH	Date	2017.07.23	
Check	LK	Version	A/0	
Approval	LSC	Unit:mm	☉ ☐	